

PARCO Barrier Guarding

Protective and Guard Rail Systems

Protect personnel and equipment both visually and physically with our Guard Rail Systems. Choose our galvanized guard rail or our structural c-channel guard rail, both offer maximum durability and protection. These economical systems can be utilized indoors or outdoors. Tubular posts are machined for continuous or perpendicular rail mounting. US D.O.T. guardrail mounting and I-beam posts available, contact factory. Post mounting hardware included. Floor mounting kit sold separately.

Guard Rail Systems					
Model No.	Height	Length	Mounting Posts Required	Radius	Net Wt. (lbs)
Galvanized Guard Rail - Straight Rails					
GR-4	12"	48"	2	--	44
GR-6	12"	72"	2	--	66
GR-8	12"	96"	2	--	89
GR-10	12"	120"	3	--	112
GR-12	12"	120"	3	--	133
Powder Coat Guard Rail - Straight Rails					
GR-4-PC-YEL	12"	48"	2	--	44
GR-6-PC-YEL	12"	72"	2	--	66
GR-8-PC-YEL	12"	96"	2	--	89
GR-10-PC-YEL	12"	120"	3	--	112
GR-12-PC-YEL	12"	120"	3	--	133
Galvanized Guard Rail - Curved Rails 90°					
GR-4-CRV	12"	48"	2	30½"	44
GR-6-CRV	12"	72"	2	46"	66
GR-10-CRV	12"	120"	3	75½"	112
GR-12-CRV	12"	144"	3	91½"	133
Guard Rail Options					
Model No.	Description			Guard Rail Levels	Net wt. (lbs)
GR-SP	Spring Post - 24" high			1	21
GR-TP18	Tubular Post 18" high (10"x10" base plate)			1	41
GR-TP42	Tubular Post 42" high (10"x10" base plate)			2	60
GR-TP60	Tubular Post 60" high (10"x10" base plate)			3	89
GR-TP72	Tubular Post 72" high (10"x10" base plate)			3	109
Tubular Posts for Drop-In Design					
GR-TP18-DI	18" high post (10"x10" base plate)			1	46
GR-TP42-DI	42" high post (10"x10" base plate)			2	65
GR-TP60-DI	60" high post (10"x10" base plate)			3	94
GR-TP72-DI	72" high post (10"x10" base plate)			3	114
GR-BKT-DI	Extra post mounting bracket				5
GR-CAP	Plastic End Cap 7"Wx13½"Hx4"D (adds 3" to length)				7
GR-BG	Buffer End Guard 48"Lx16"Hx12½"D (adds 28" to length)				40
GR-TG	Flared End Guard 27"Lx18"Hx10"D (adds 18" to length)				30
GR-ABK	Mounting Kit (4) ¾" x 4" Anchor Bolts				2
GR-SPP	Spring Post Mounting Plate (Asphalt)				3



Series GR



Series GR-CRV




Drop in Style Posts
Series GR-TP-DI



Tubular Post
Series GR-TP



Plastic End Caps
Series GR-CAP

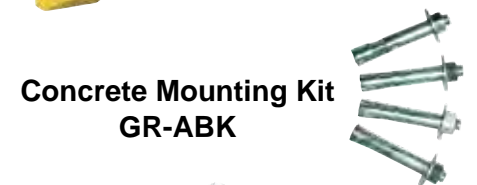

Concrete Mounting Kit
GR-ABK



Buffer End Guard
GR_BG



Flared End Guard
GR-TG

PARCO Barrier Guarding

Structural Guard Rail Systems

Constructed of structural C-channel 8.2 lbs. per foot for maximum strength and protection. Drop in style design protects personnel and machinery. Railing can be removed in a matter of seconds. Features a 10 x 10" base plate with 4 pre-drilled mounting holes. Available in custom lengths.

Structural Guard Rail Systems			
Model No.	Height	Length	Net Wt. (lbs)
Structural Guard Rail			
ST-GR-4	8"	48"	46
ST-GR-6	8"	72"	69
ST-GR-8	8"	96"	92
ST-GR-10	8"	120"	115
ST-GR-12	8"	144"	138
Tubular Mounting Posts with Drop-In Style Bracket			
STGR-TP-18DI	18" High Post (Accommodates 1 Rail)		47
STGR-TP-42DI	42" High Post (Accommodates 2 Rail)		67
STGR-TP-60DI	60" High Post (Accommodates 3 Rail)		95
STGR-TP-72DI	72" High Post (Accommodates 3 Rail)		116
STGR-BKT-DI	Extra Post Mounting Bracket		5



Series ST-GR



ST-TP-DI

Structural Guard Rail - Drop-in and Bolt-on Style

Create a modular system to protect equipment, inventory, and individuals from damage or injury with this highly visible powder coat yellow Structural Guard Rail. Triple ridge corrugated rails are constructed from 1/8" thick material, made for high impact resistance indoors or out. Posts are constructed of round corner 1/4" thick material. The steel base plate measures 10" square and is 5/8" thick. Bolts, anchors, washers, and nuts are provided with individual post sections. Concrete mounting kit is available separately. Provide a strong barrier with easy accessibility with our Drop-In Style rails. Slide rail sections into post saddles for simple assembly. Each Drop-In Style rail section includes two brackets. Bolt-On Style rails are designed for permanent installation.

Structural Guard Rail Systems				
Model No.	Height	Length	Mounting Posts Req'd	Net Wt. (lbs)
Structural Guard Rail Systems - Drop in style (2 brackets per rail included)				
YGR-LO-4	14½"	48"	2	54
YGR-LO-6	14½"	72"	2	74
YGR-LO-8	14½"	96"	2	94
YGR-LO-10	14½"	120"	3	114
Structural Guard Rail Systems -Bolt-on style				
YGR-B-4	14½"	48"	2	44
YGR-B-6	14½"	72"	2	64
YGR-B-8	14½"	96"	2	84
YGR-B-10	14½"	120"	3	104
YGR-TP18	18"	Tubular Posts		40
YGR-TP42	42"	Tubular Posts		65
YGR-ABK-4	Concrete Mounting Kit, (4) Lag Bolts			4



Drop-in style
YGR-LO-4 & YGR-
TP42-S (2 ea)



Bolt-on style YGR-LO-4 (qty 2), YGR-TP42-S, YGR-TP-42-C, YGR-LO-6, YGR-TP18-S.

PARCO Barrier Guarding

Steel Pipe Safety Bollards

Bollards can be used both indoors and outdoors to protect work areas, racking and personnel. Powder coated safety yellow finish. Molded rubber caps are removable on 4½" and 5½" diameter units. Steel caps are welded on the 1¾" diameter units. Base plate measures 8" x 8", on the 4.5 and 5.5 units (5" x 5" on the 1¾" units), and include four (4) pre-drilled mounting holes. Mounting kits and replacement caps available. Welded steel construction.

Steel Pipe Safety Bollards				
Model No.	Description	Height	Outside Diameter	Net Wt. (lbs)
BOL-24-2	Yellow Steel Pipe Bollard	24"	1¾"	12
BOL-36-2	Yellow Steel Pipe Bollard	36"	1¾"	15
BOL-42-2	Yellow Steel Pipe Bollard	42"	1¾"	16
BOL-48-2	Yellow Steel Pipe Bollard	48"	1¾"	22
BOL-24-4.5	Yellow Steel Pipe Bollard	24"	4½"	34
BOL-36-4.5	Yellow Steel Pipe Bollard	36"	4½"	45
BOL-42-4.5	Yellow Steel Pipe Bollard	42"	4½"	50
BOL-48-4.5	Yellow Steel Pipe Bollard	48"	4½"	56
BOL-24-5.5	Yellow Steel Pipe Bollard	24"	5½"	42
BOL-36-5.5	Yellow Steel Pipe Bollard	36"	5½"	57
BOL-42-5.5	Yellow Steel Pipe Bollard	42"	5½"	69
BOL-48-5.5	Yellow Steel Pipe Bollard	38"	5½"	78
BOL-ABK-3	Mounting Kit (4) ¾"x3" Anchor Bolts (for 1¾" dia. bollards)			2
BOL-ABK-4	Mounting Kit (4) ¾"x4" Anchor Bolts (for 4½" & 5½" dia. bollards)			2



High-Profile Machinery Guards

Ideal for inplant use to protect expensive equipment. A bar runs horizontally half way up on 42" high units. Safety yellow durable powder coat finish standard. All 42" high units include a 21" mid-rail to comply with OSHA handrailing requirements. Welded steel construction.

High Profile Machinery Guards					
Model No.	Description	Height	Length	Outside Diameter	Net Wt. (lbs)
HPRO-36-24-2	High Profile Guard	24"	36"	1 ¾"	30
HPRO-48-24-2	High Profile Guard	24"	48"	1 ¾"	40
HPRO-36-36-2	High Profile Guard	36"	36"	1 ¾"	38
HPRO-48-36-2	High Profile Guard	36"	48"	1 ¾"	48
HPRO-36-42-2	High Profile Guard	42"	36"	1 ¾"	42
HPRO-48-42-2	High Profile Guard	42"	48"	1 ¾"	52
HPRO-36-24-4	High Profile Guard	24"	36"	4"	53
HPRO-48-24-4	High Profile Guard	24"	48"	4"	69
HPRO-36-36-4	High Profile Guard	36"	36"	4"	74
HPRO-48-36-4	High Profile Guard	36"	48"	4"	82
HPRO-36-42-4	High Profile Guard	42"	36"	4"	89
HPRO-48-42-4	High Profile Guard	42"	48"	4"	93
HPRO-ABK-3	Mounting Kit (8) ¾" x 3" Anchor Bolts (for 1¾" dia. guards)				4
HPRO-ABK-4	Mounting Kit (8) ¾" x 4" Anchor Bolts (for 4½" & 5½" dia. guards)				4

